

"Built for the Tree Professional"

**cmc**<sup>®</sup>  
AERIAL PLATFORMS

**S19N**  
ARBOR PRO



☎ 1300 072 926

VIC 24-28 Williams Road Dandenong Sth. 3175  
E [vic@globalmachinerysales.com.au](mailto:vic@globalmachinerysales.com.au)  
F (03) 9791 7676

NSW Unit 1/21 Penny Place Arndell Park 2148  
E [nsw@globalmachinerysales.com.au](mailto:nsw@globalmachinerysales.com.au)  
F (02) 8678 2478



[globalmachinerysales.com.au](http://globalmachinerysales.com.au)





**The CMC 19N Arbor Pro (now available with safer, non-slip outrigger pads and a new arborist saw holder) has been built for one of the roughest industries on this planet - the tree industry.**

The manufacturing concept of CMC S19N Arbor Pro stems from the well established and appreciated CMC S15, getting its ease of use, the compact dimensions and the great reliability combined with generous performances that place the machine at the maximum levels of the category!

A width of 78cm, a height less than 2 metres and a length of 4.48m makes the CMC S19N Arbor Pro the most compact machine in its category!

The CMC S19N Arbor Pro is a narrow tracked boom lift. It is ultra compact and user friendly, with intuitive controls and no fuss. The S19N can pass through a single doorway and operate in the tightest of spaces.

Once setup, impressive height and outreach can be achieved. The CMC S19N Arbor Pro has a maximum basket capacity of 230 kg and is the beginning of a new and advanced generation of narrow access lifts.





**Single Doorway  
width (780mm)**



**Simple Control  
System**



**Hydraulic  
Extending Tracks**



**Towable  
Transportable**



**OPTIONAL Dual  
Voltage AC Motor**



**OPTIONAL Kubota  
Diesel Engine**



### **Simple to use**

User-friendly, with intuitive 4-step operation from start to working at height.

### **Versatile**

Articulating boom, with telescopic and jib. Plus innovative basket design.

### **Service friendly**

Simple operating system with fault code diagnosis and easy to repair on-site.

### **Compact**

The most compact dimensions of any Spiderlift in this height range.

### **Power**

Honda GX390 Petrol engine with 240v 15amp 2.2kw AC motor.

### **Towable**

Low weight and compact, so suitable to tow on a trailer behind mid-size vans and 4x4s.



### PERFORMANCE

Max working height	18.8m
Max working outreach (with ≤ 120kg)	9.2m
Max basket capacity	230kg
Jib movement	90°
Turret rotation	356°
(P) Max slope to stabilise	5° / 9%
Tracks extension/retraction	0.30m
(W) Max angle approach	16° / 29%
(X) Max travel slope	20° / 36%
Max travel speed	1.06km/h

### DIMENSIONS



(A) Basket height	1.10m
(B) Basket width	0.70m
(C) Basket length	1.40m
(D) Total length	5.12m
(E) Total length without basket	4.48m
(F) Height in driving position	1.97m
(G) Total width (without basket)	0.78m
(H) Free height from the ground	0.23m
(I) Tracks (LxW)	1.44 x 0.18m
(J) Maximum longitudinal stabilisation	3.58m
(K) Maximum cross stabilisation	2.84m
Stabilisers plate	0.18m

### WEIGHTS

Total weight (Honda engine)	2,600kg
Total weight (Kubota engine)	2,600kg
Max pressure on the foot	6.3kg/cm <sup>2</sup>
Max pressure on the track	0.87kg/cm <sup>2</sup>
Max pressure in travel	313kg/m <sup>2</sup>
Max pressure in work	205kg/m <sup>2</sup>

### POWER

Engine	Honda GX390 Petrol
Electric motor	240v 15amp 2.2kw

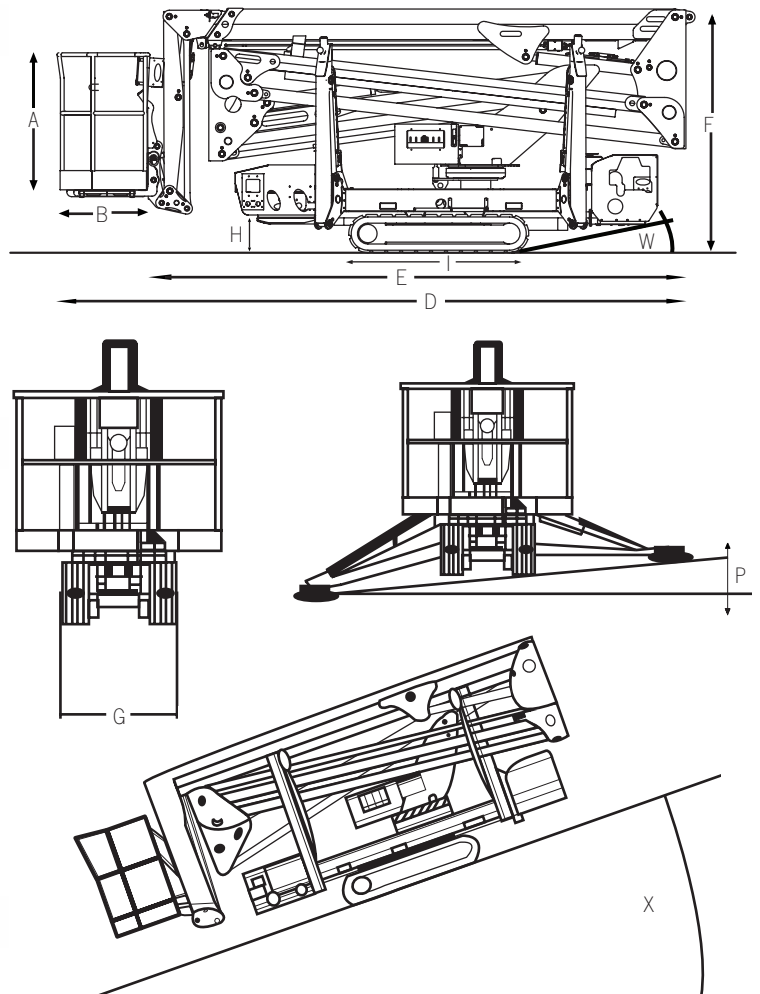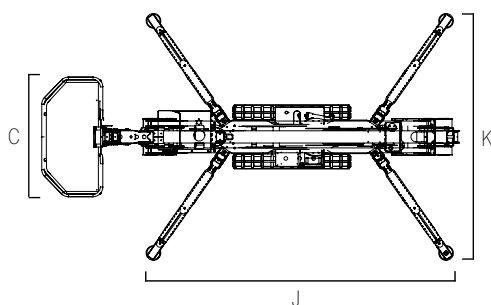

MAX LOAD 230 KG 230 KG 150 KG

