



📞 1300 072 926

VIC 24-28 Williams Road Dandenong Sth. 3175
E vic@globalmachinerysales.com.au
F (03) 9791 7676

NSW Unit 1/21 Penny Place Arndell Park 2148
E nsw@globalmachinerysales.com.au
F (02) 8678 2478





CMC S19 N version "N" is the most compact spider lift access platform available in this size range with the shortest stabilising width area at less than 3 metres!

The manufacturing concept of CMC S19N stems from the well established and appreciated CMC S15, getting its ease of use, the compact dimensions and the great reliability combined with generous performances that place the machine at the maximum levels of the category!



A width of 78cm, a height less than 2 metres and a length of 4.48m makes the CMC S19N the most compact machine in its category!

The CMC S19N is a narrow tracked boom lift. It is ultra compact and user friendly, with intuitive controls and no fuss. The S19N can pass through a single doorway and operate in the tightest of spaces.

Once setup, impressive height and outreach can be achieved. The CMC S19N has a maximum basket capacity of 230 kg and is the beginning of a new and advanced generation of narrow access lifts.





**Single Doorway
width (780mm)**



**Simple Control
System**



**Hydraulic
Extending Tracks**



**Towable
Transportable**



**OPTIONAL Dual
Voltage AC Motor**



**OPTIONAL Kubota
Diesel Engine**



Simple to use

User-friendly, with intuitive 4-step operation from start to working at height.

Versatile

Articulating boom, with telescopic and jib. Plus innovative basket design.

Service friendly

Simple operating system with fault code diagnosis and easy to repair on-site.

Compact

The most compact dimensions of any Spiderlift in this height range.

Power

Honda GX390 Petrol engine with 240v 15amp 2.2kw AC motor.

Towable

Low weight and compact, so suitable to tow on a trailer behind mid-size vans and 4x4s.

PERFORMANCE

Max working height	18.8m
Max working outreach (with ≤ 120kg)	9.2m
Max basket capacity	230kg
Jib movement	90°
Turret rotation	356°
(P) Max slope to stabilise	5° / 9%
Tracks extension/retraction	0.30m
(W) Max angle approach	16° / 29%
(X) Max travel slope	20° / 36%
Max travel speed	1.06km/h

DIMENSIONS



(A) Basket height	1.10m
(B) Basket width	0.70m
(C) Basket length	1.40m
(D) Total length	5.12m
(E) Total length without basket	4.48m
(F) Height in driving position	1.97m
(G) Total width (without basket)	0.78m
(H) Free height from the ground	0.23m
(I) Tracks (LxW)	1.44 x 0.18m
(J) Maximum longitudinal stabilisation	3.58m
(K) Maximum cross stabilisation	2.84m
Stabilisers plate	0.18m

WEIGHTS

Total weight (Honda engine)	2,600kg
Total weight (Kubota engine)	2,600kg
Max pressure on the foot	6.3kg/cm ²
Max pressure on the track	0.87kg/cm ²
Max pressure in travel	313kg/m ²
Max pressure in work	205kg/m ²

POWER

Engine	Honda GX390 Petrol
Electric motor	240v 15amp 2.2kw

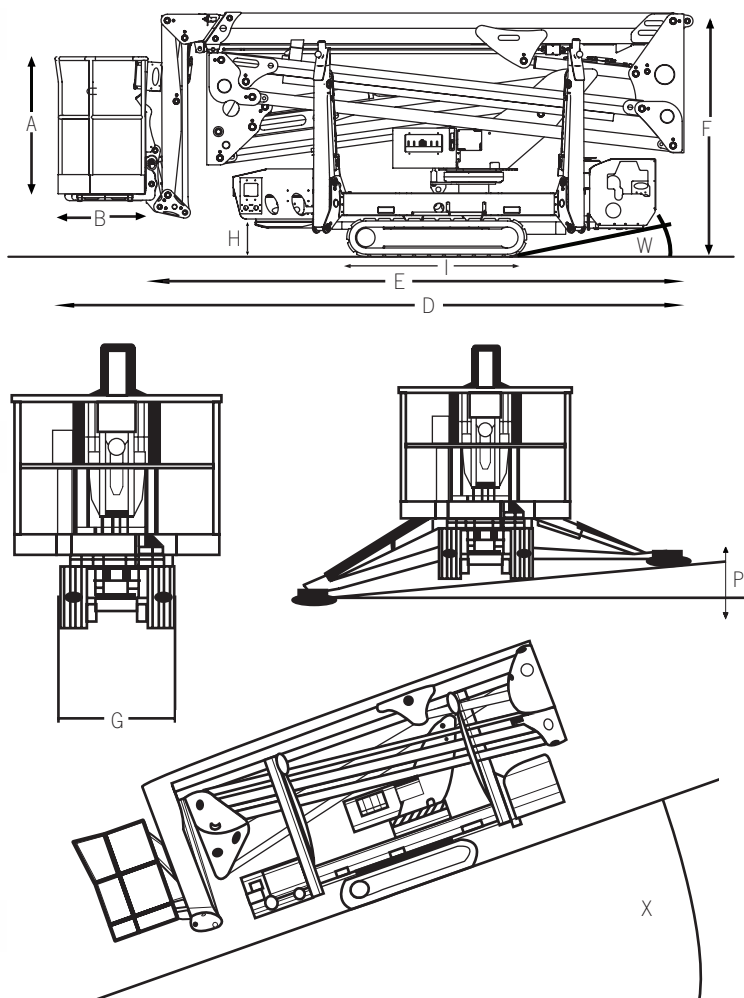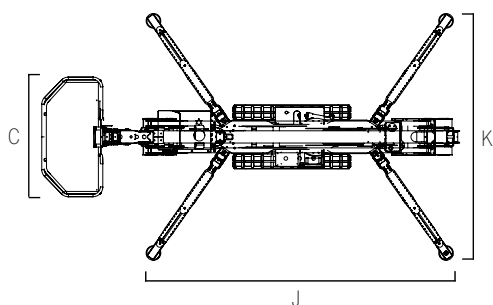

 MAX LOAD 230 KG  230 KG  150 KG

