



S19HD | HD Heavy Duty Series

VIC 24-28 Williams Road Dandenong Sth. 3175
E sales@globalmachinerysales.com.au

NSW Unit 49-50 Cassola Pl, Penrith NSW 2750
E sales@globalmachinerysales.com.au


QLD 191 Magnesium Dr, Crestmead QLD 4132
E sales@globalmachinerysales.com.au



globalmachinerysales.com.au



1300 072 926

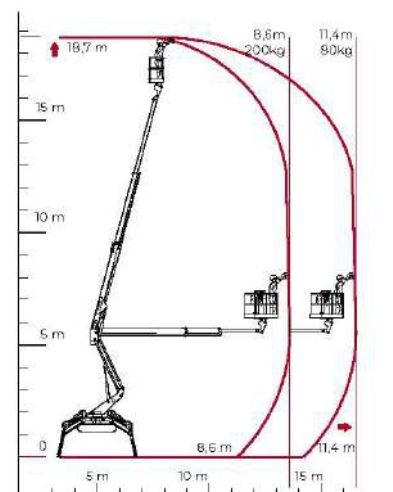

HD Heavy Duty Series

TECHNICAL SHEET

PERFORMANCE AND DIMENSIONS

Main features

This articulated platform with pantograph and telescopic boom offers outstanding performance thanks to its stabilizers of high levelling capacity. Designed for maximum work performance on the toughest terrain, it's an excellent alternative to a truck-mounted platform.

Max. working height 18,7 m

Max. reach with 80 kg 11,4 m

Platform height 16,7 m





Max. load in basket 200 kg

Basket dimensions 1,4 x 0,7 x 1,1 m

Basket rotation +90°/-87° (options)

Turret rotation +/- 355° (710° continuous)

Total weight 2872 Kg

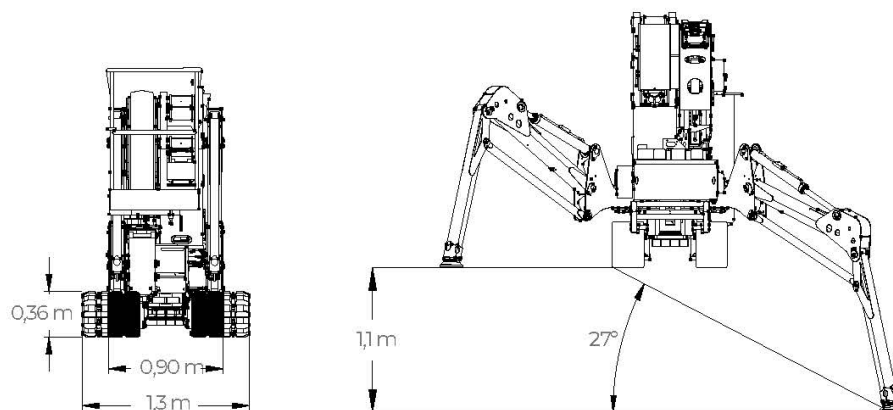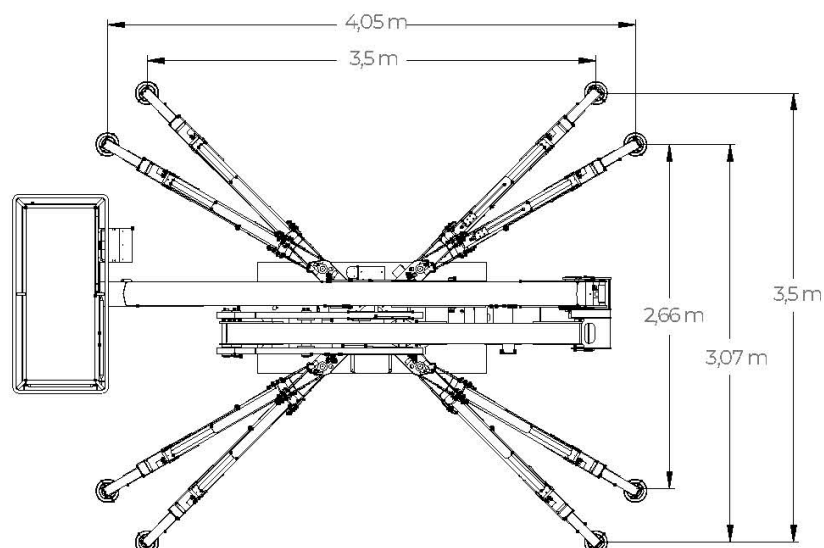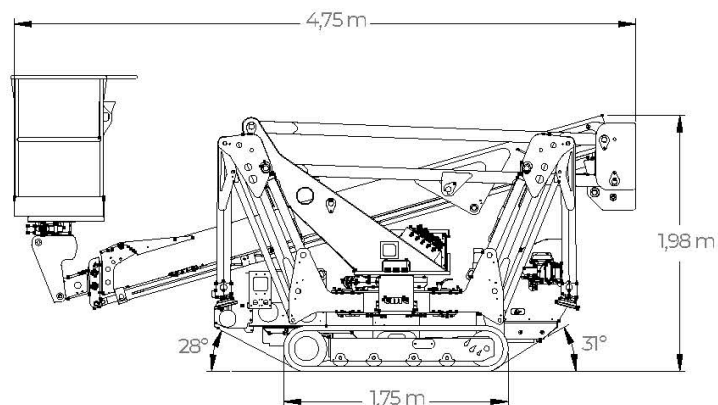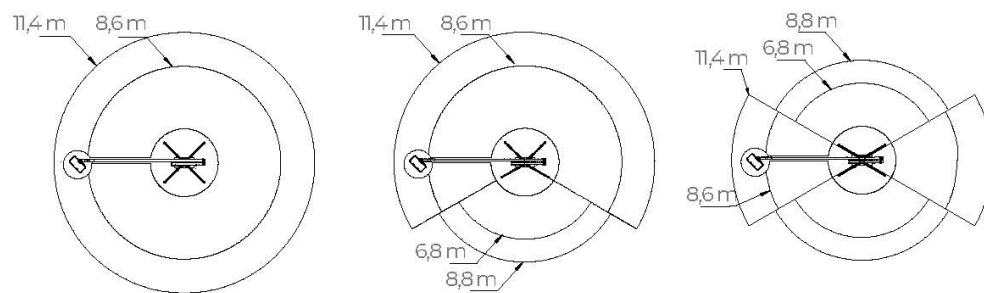

22-05-TS-EN-01